

## 33025HC-D

### PET Film Double-Sided Tape

#### ◆ Technical Data

##### ● Product Description

It uses thin layer of PET film as base material,transparent colloform.Excellent function with steel and plastic surface and good adhesion to general foam.


##### ● Key Features

High adhesion level relative to low thickness  
 Very low thickness of only 25μm (5um of tolerance)  
 Easy application to a curved surface.  
 Excellent resistance to demanding environmental conditions.  
 Excellent handling performance in converting processes.

##### ● Application Ideas

Used for mounting of metal or plastic badges and sings.  
 Fixing of reflection foil to LCD frame LCD  
 Splicing of thin plastic films

##### ● Construction

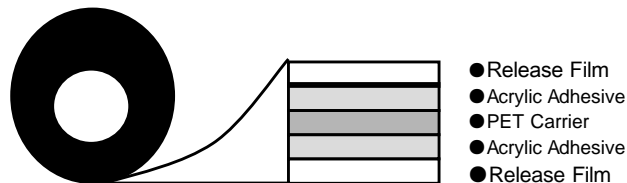

#### ◆ Technical Data

Test Item	Unit	Value	Test Method
Thickness	mm	0.025	GB/T 7125
Standard Roll Width	mm	1020	—
Standard Roll Length	m	200	—
Initial Adhesion	Ball No.	3#	GB/T4852,Ball tack. J.dow method at room temperature. Tape size: 100mm*150mm.
Release Film	mm	0.025	GB/T 7125
		0.075	
180° Peel Adhesion	gf/25mm	≥1300	GB/T2792,180°peel strength to substrate at room temperature,tape size:25mm*150mm
Holding Power	hrs	≥24	GB/7754,Tensile strength, tape size:25mm*25mm, loading: 1kg
Color	Transparent		—

## ◆ Shelf Life & Storage Conditions

- Tape in roll form: Shelf life 12 months from the date of manufacture when stored in original cartons at 20°C and 50% relative humidity.
  - Ideal tape application temperature range is 21°C to 38°C.
- 

## ◆ Notes

The information contained in this data sheet is intended to assist you in designing with Incheng adhesive tape. The technical information and data should be considered representative or typical only. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for particular purpose or that the results shown on this data sheet will be achieved by user for a particular purpose. The user should determine the suitability of Incheng adhesive tape for each application.

---

Servtek Materials Technology (Guangzhou) Co., Ltd



Http: [www.servtek.cn](http://www.servtek.cn)

Tel : (+86)20-38892652/38255282

Fax: (+86)20-38892205