

### 3306S

#### PET Single-Sided Tape

PET单面胶带

#### ◆ Technical Data 技术资料


● **Product Description**  
产品描述

It uses layer of PET film as base material, with acrylic adhesive on one side.  
是一款PET膜作为基材的单面亚克力胶带

● **Key Features** 主要特点

Good adhesion. 粘性好  
Good insulation 良好的绝缘性  
Good ageing resistance 良好的耐老化性

● **Construction** 结构

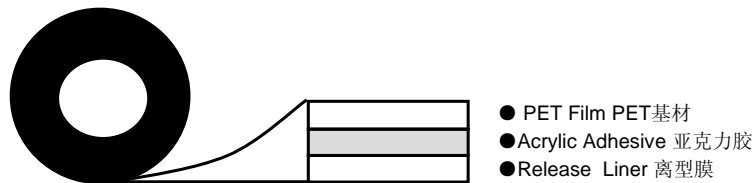

#### ◆ Technical Data 技术资料

Test Item 测试项目	Unit 单位	Value 测试值	Test Method 测试方法
Total Thickness 总厚	um	54±5	ASTM-1000
180° Peel Adhesion 剥离力	gf/25mm	1100	GB/T2792
Holding Power 保持力	hrs	≥24	GB/7754
Color 颜色	Transparent 透明		—

#### ◆ Shelf Life & Storage Conditions 有效期&储存条件

● Tape in roll form: Shelf life 6 months from the date of manufacture when stored in original cartons at 20°C and 50% relative humidity.

自生产日期开始6个月内有效，原始箱内并存放在阴凉地方20度相对湿度50%室内。

● Ideal tape application temperature range is 15°C to 28°C.

理想的使用温度在15度至28度之间

## ◆ Notes (注意)

The information contained in this data sheet is intended to assist you in designing with Incheng adhesive tape. The technical information and data should be considered representative or typical only. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for particular purpose or that the results shown on this data sheet will be achieved by user for a particular purpose. The user should determine the suitability of Incheng adhesive tape for each application.

(本资料所述参数为您使用仁诚胶带的设计上提供信息，本技术信息和参数只代表典型案例，不能作保证系数，明示或默示，包括任何适销性或特别案例的适合性能或是结果只是该用户的特定案例的结果而已。用户需考虑使用仁诚胶带的每一个应用的适用性)

---

Servtek Materials Technology (Guangzhou) Co., Ltd



Http: [www.servtek.cn](http://www.servtek.cn)

Tel : (+86)20-38892652/38255282

Fax: (+86)20-38892205